

17.000	0.00	1224.00
12.250	1224.00	5707.00
8.500	5707.00	8150.00

CASING RECORD				
Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	13.375	0.00	1224.00	48.00
CASING	9.625	0.00	5707.00	43.00

WELL DIAGRAM

13.38 in Casing: 0.00 ft

9.63 in Casing: 0.00 ft

17.00 in Bit size: 0.00 - 1224.00 ft

13.38 in Casing shoe: 1224.00 ft

12.25 in Bit size: 1224.00 - 5707.00 ft

9.63 in Casing shoe: 5707.00 ft

8.50 in Bit size: 5707.00 - 8150.00 ft

Total bit depth: 8150.00 ft

Temperature: 103.00 Degrees F

DOWNHOLE EQUIPMENT

D:\LOGS\PERU\TALARA\LO6-33D-CWS\merge-PROCESS-lo6-33d2.dta

Shuttle Running Tool 3.5"

SRT-A.A 31 LG: 6.62 ft WT: 37.5 lb OD: 2.52 in

SKJ-E.B Compact Knuckle Joint

SKJ-E.B 507 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MBS-F.A 200v Compact Battery Sub

MBS-F.A 116 LG: 17.06 ft WT: 123.5 lb OD: 2.24 in

Compact Memory Sub E.B

MMS-E.B 148 LG: 5.20 ft WT: 37.5 lb OD: 2.24 in

MIS-E.B Compact Inline Standoff sub

MIS-E.B 640 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

Compact Stiff Bridle Electrode Sub.

MBE-C.B 261 LG: 12.33 ft WT: 77.2 lb OD: 2.28 in

Compact Stiff Bridle Electrode Sub.

Compact Stiff Bridle Electrode Sub.
MBE-C.B 262 LG: 12.33 ft WT: 77.2 lb OD: 2.28 in

Compact Stiff Bridle Electrode Sub.
MBE-A.A 56 LG: 12.33 ft WT: 77.2 lb OD: 2.24 in

MIS-E.A Compact Inline Standoff sub
MIS-E.A 230 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

Compact Short Gamma
MGS-C.A 43 LG: 3.41 ft WT: 24.3 lb OD: 2.24 in

Compact Collar Locator
MCL-B.J 57 LG: 3.17 ft WT: 26.5 lb OD: 2.24 in

SKJ-D.A Compact Knuckle Joint
SKJ-D.A 170 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

SHA-J.B Compact Swivel Head Adaptor
SHA-J.B 486 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

MIS-D.B Compact Inline Bowspring sub
MIS-D.B 755 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

Compact Neutron
MDN-A.B 175 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Density/Caliper
MPD-C.A 238 LG: 9.59 ft WT: 90.4 lb OD: 2.24 in

MIS-D.B Compact Inline Bowspring sub
MIS-D.B 756 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in


SHA-J.B Compact Swivel Head Adaptor
SHA-J.B 479 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

SKJ-D.A Compact Knuckle Joint
SKJ-D.A 177 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MIS-E.B Compact Inline Standoff sub
MIS-E.B 641 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

Compact Upper Guard sub
MUG-B.B 260 LG: 8.98 ft WT: 68.3 lb OD: 2.24 in

Compact Laterolog Electrode Sub.
MLE-D.A 228 LG: 12.34 ft WT: 92.6 lb OD: 2.24 in

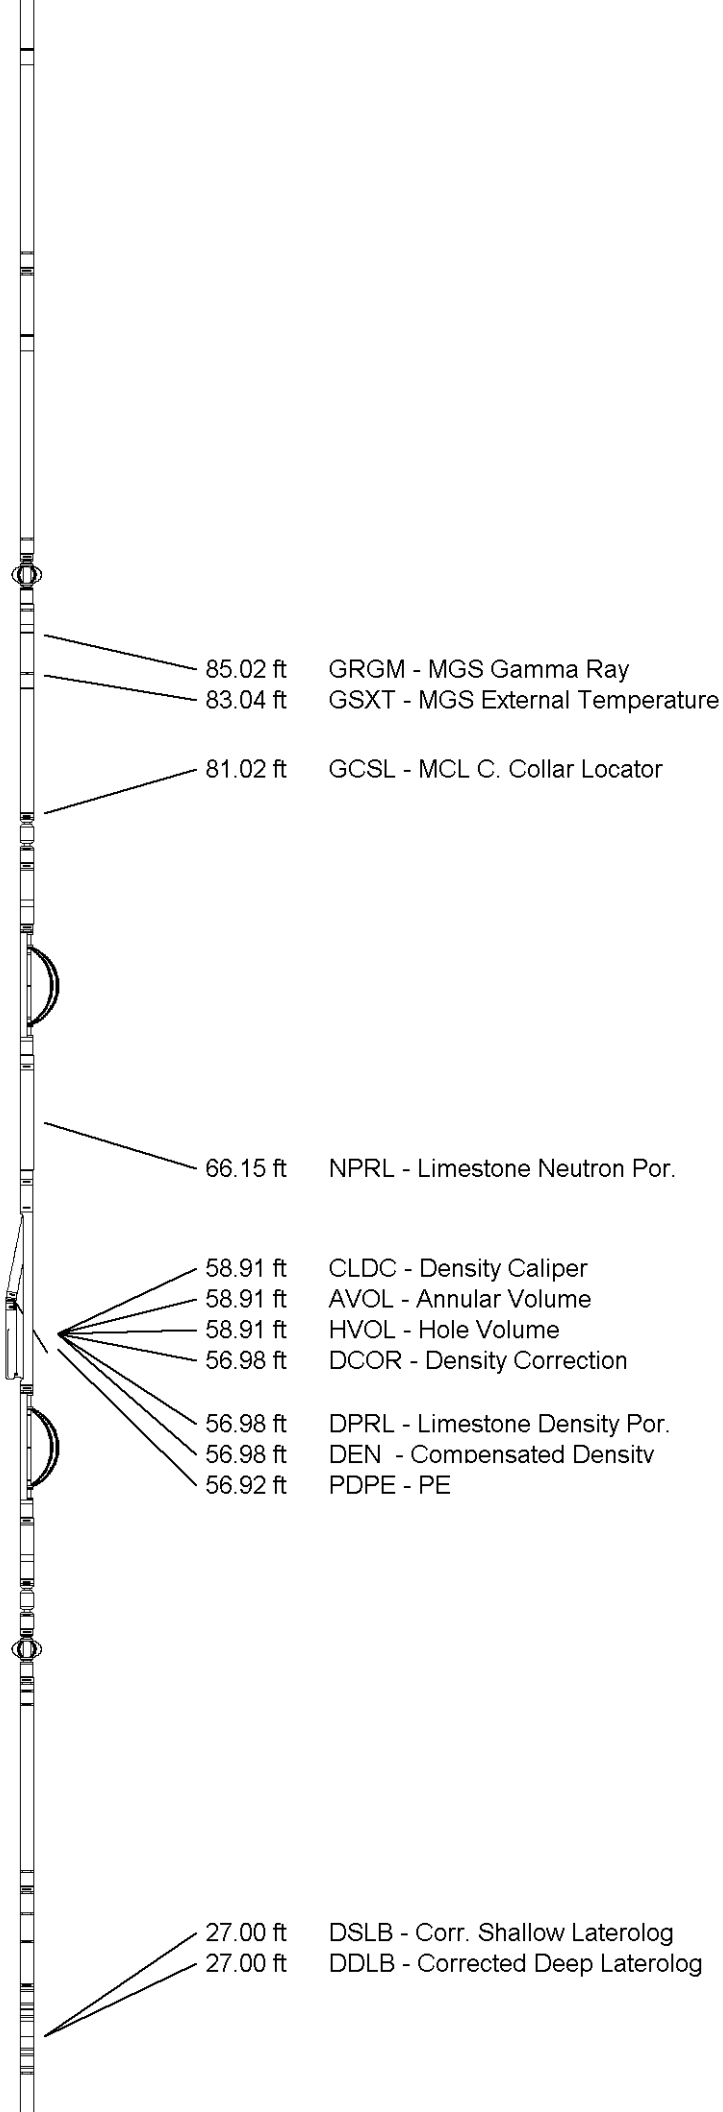


Compact Lower Guard Sub.
MLG-B.B 257 LG: 8.00 ft WT: 55.1 lb OD: 2.24 in


MIS-E.A Compact Inline Standoff sub
MIS-E.A 152 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in


Compact Induction
MAI-B.A 223 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in


Total Length: 158.25 ft Weight: 1131.0 lb

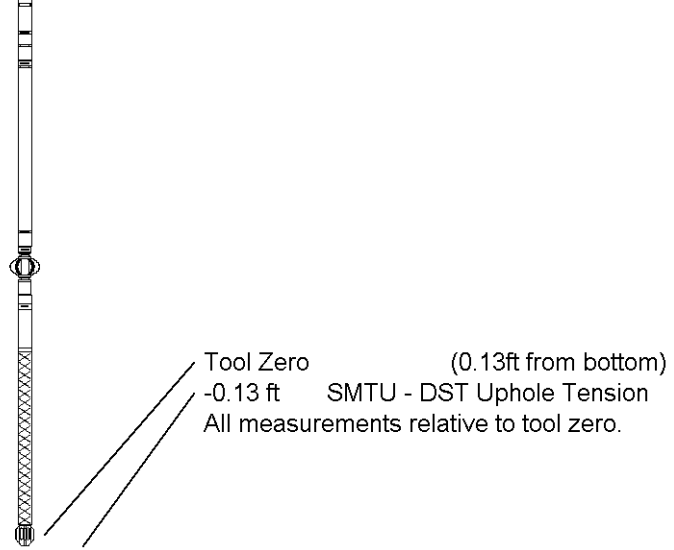



All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

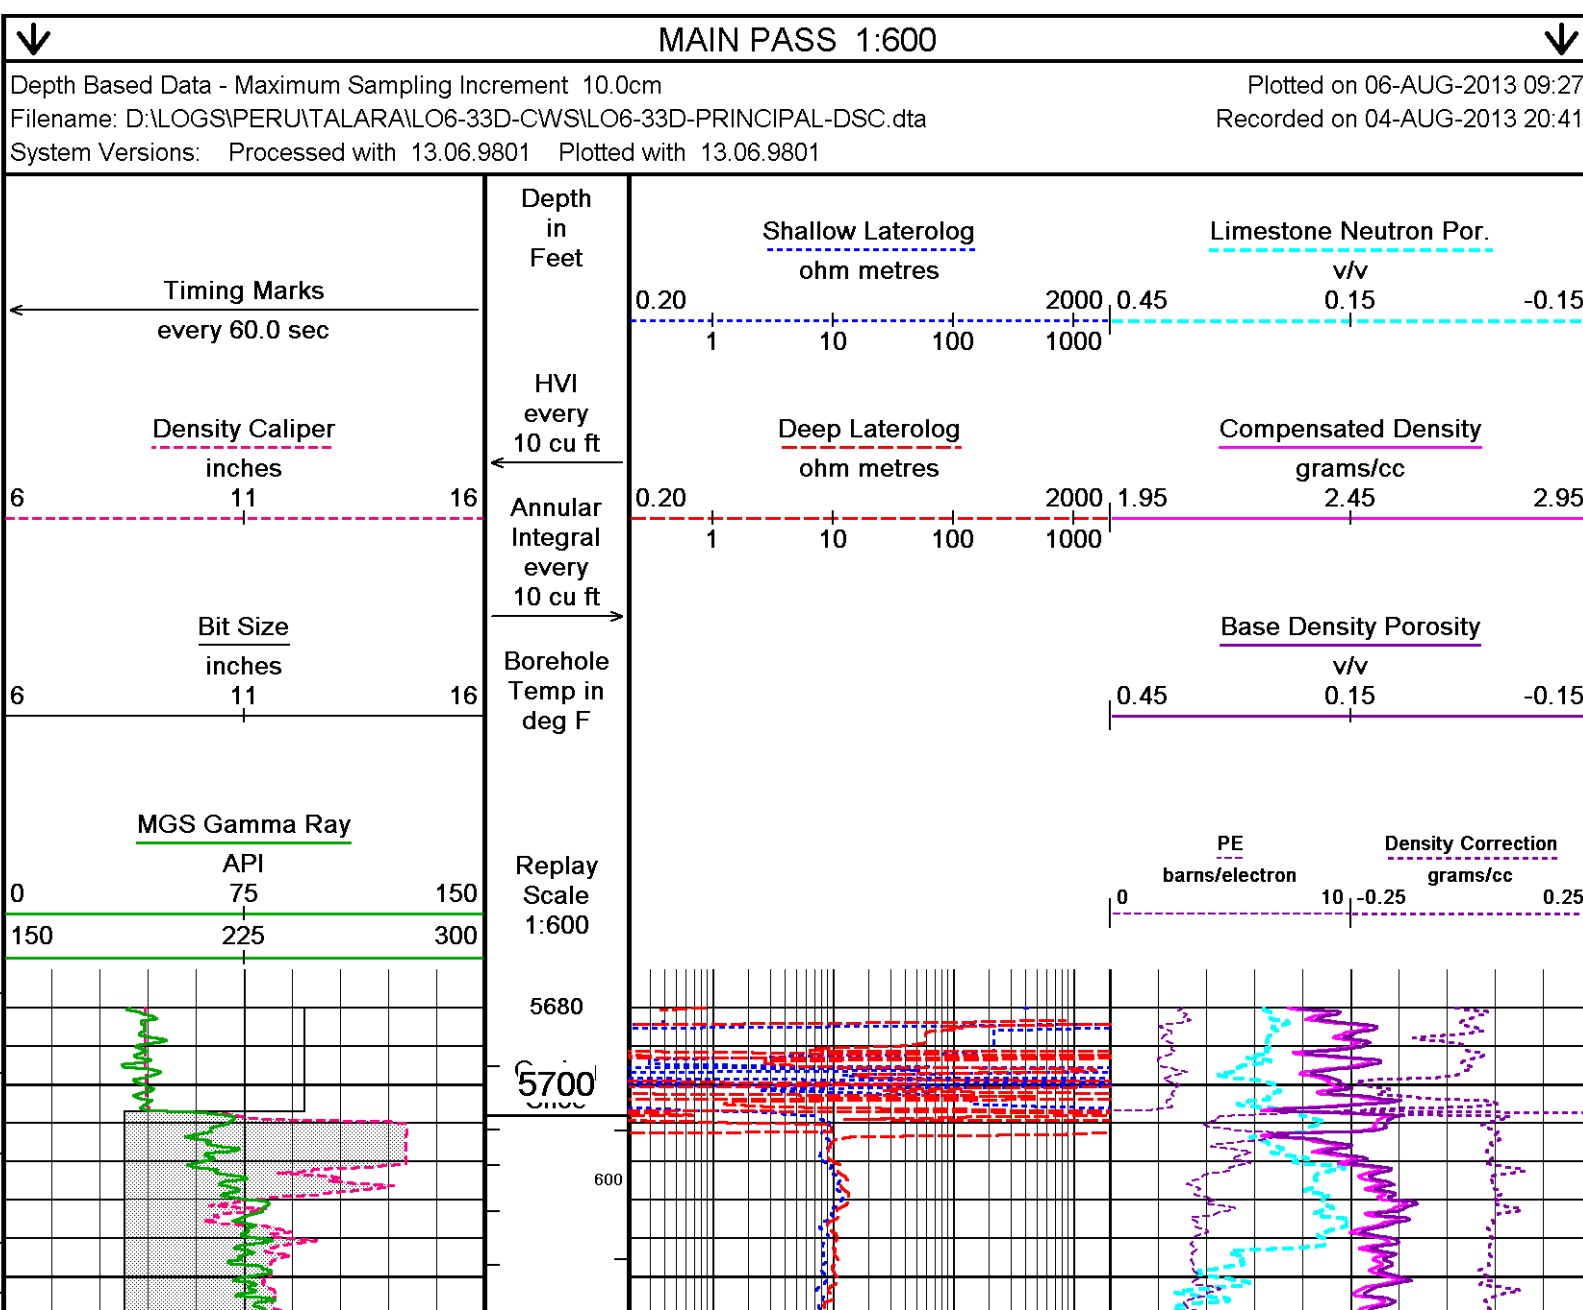


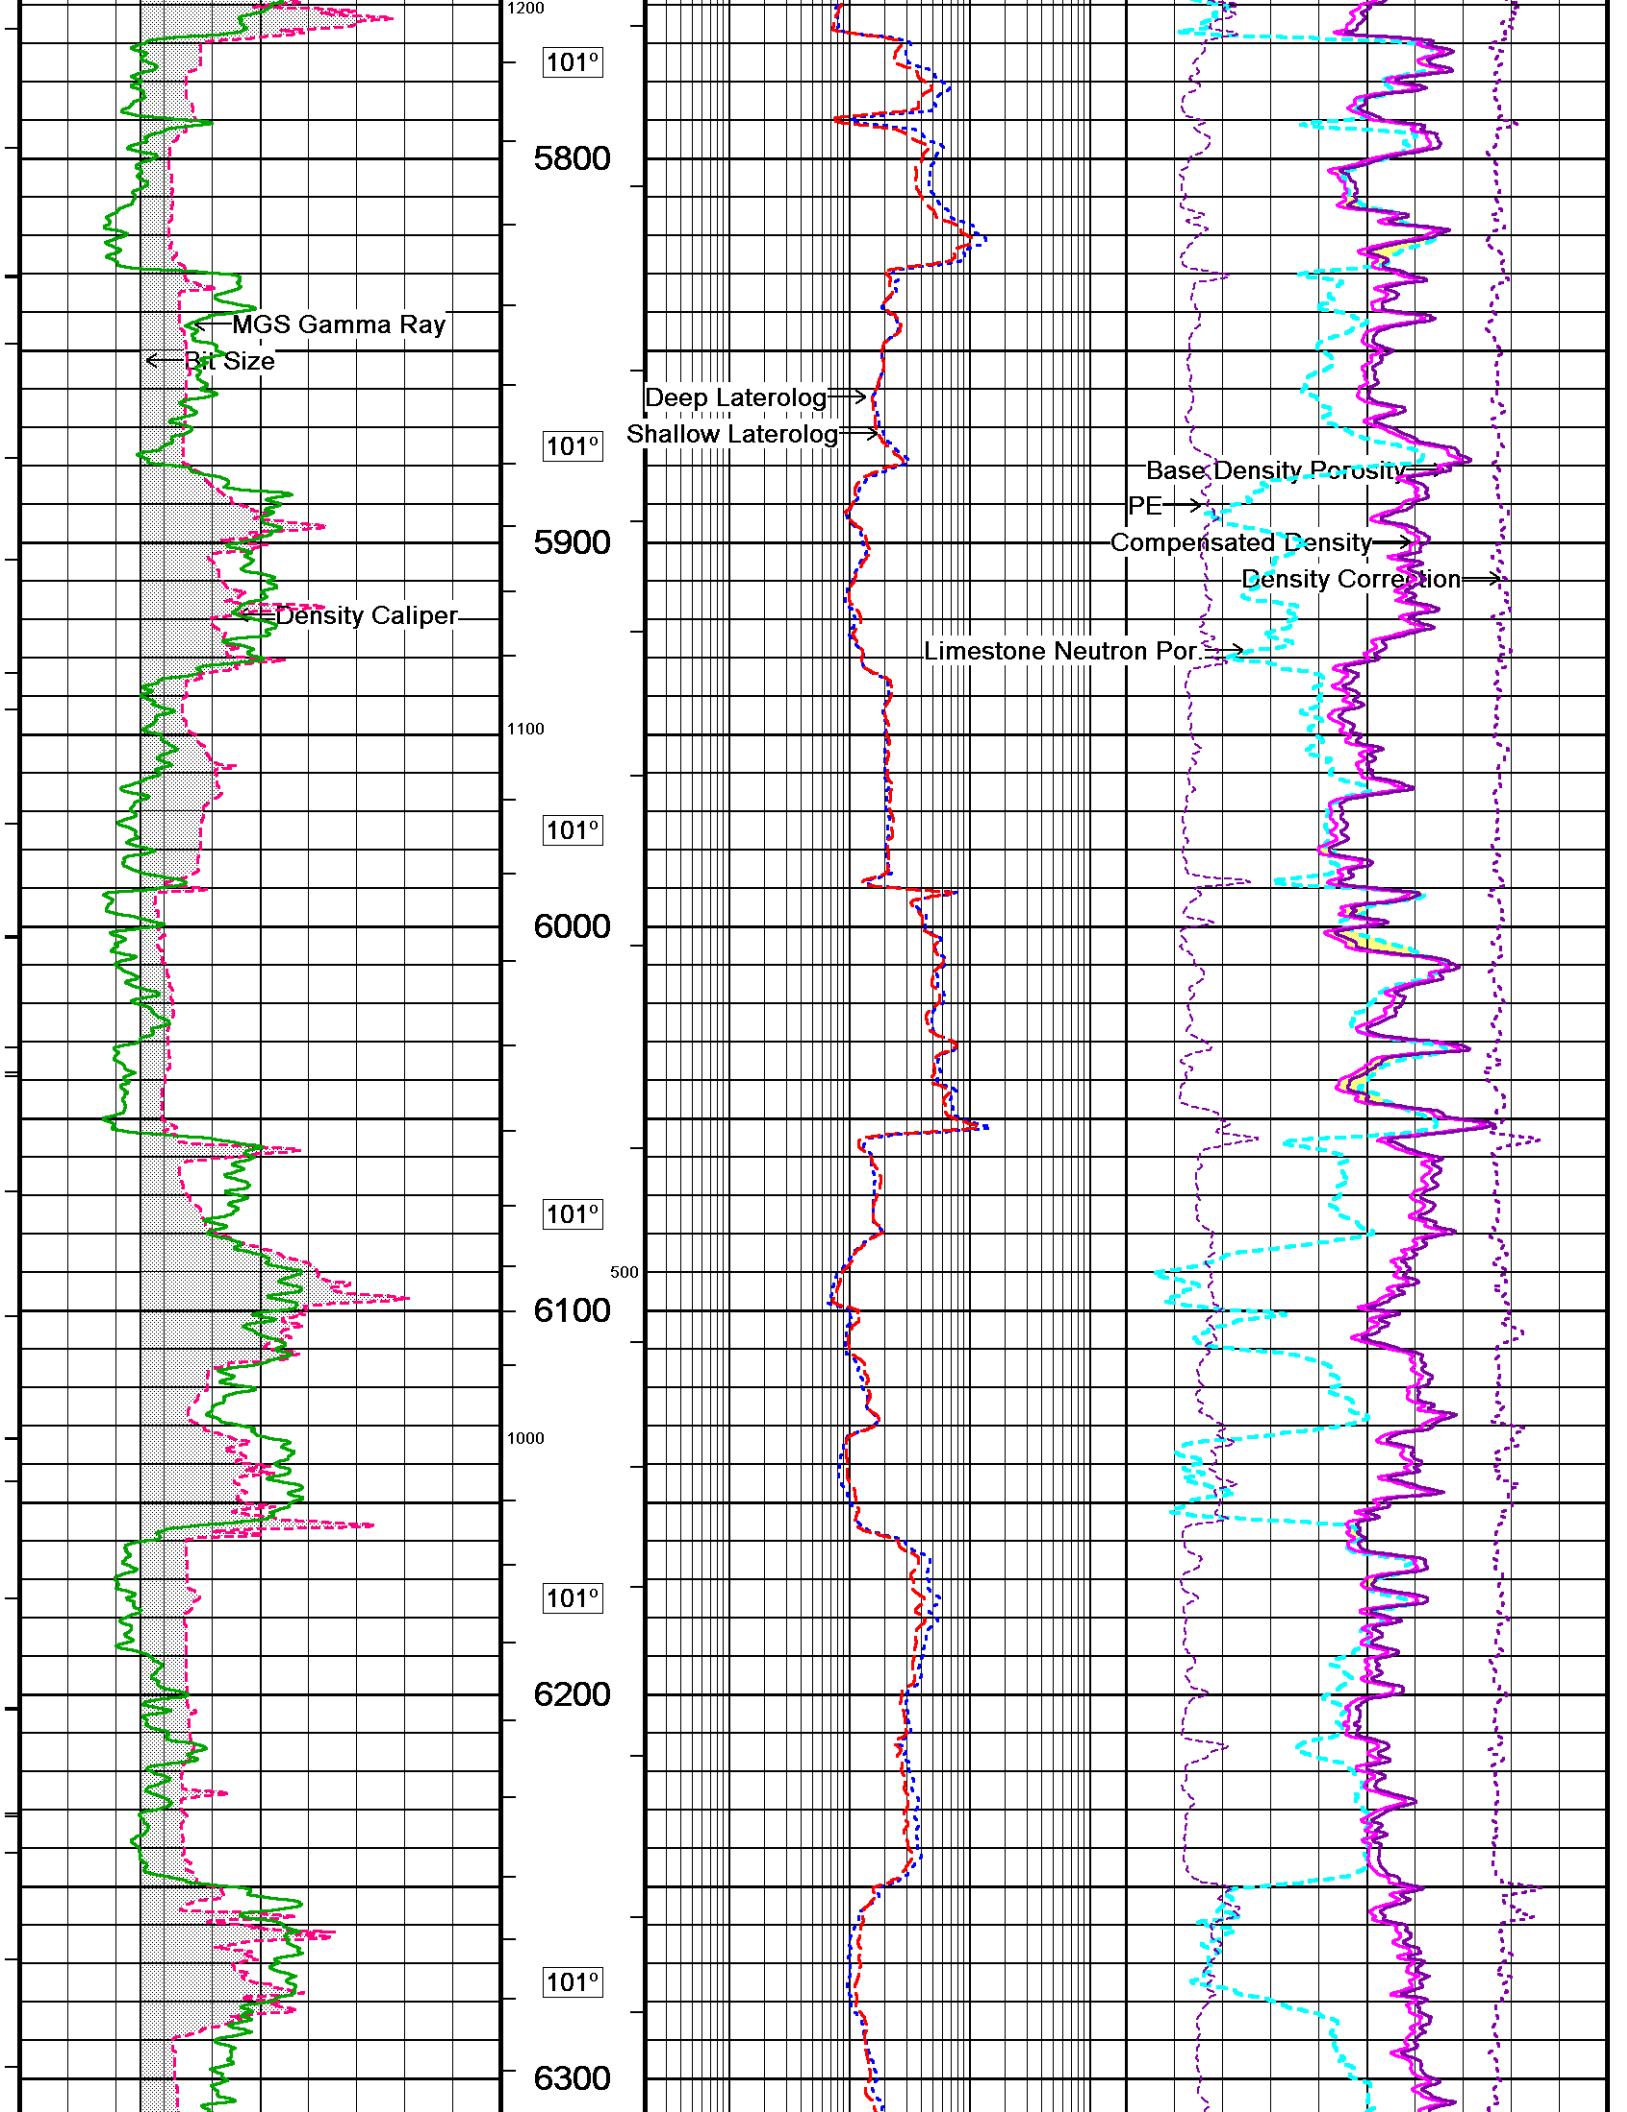

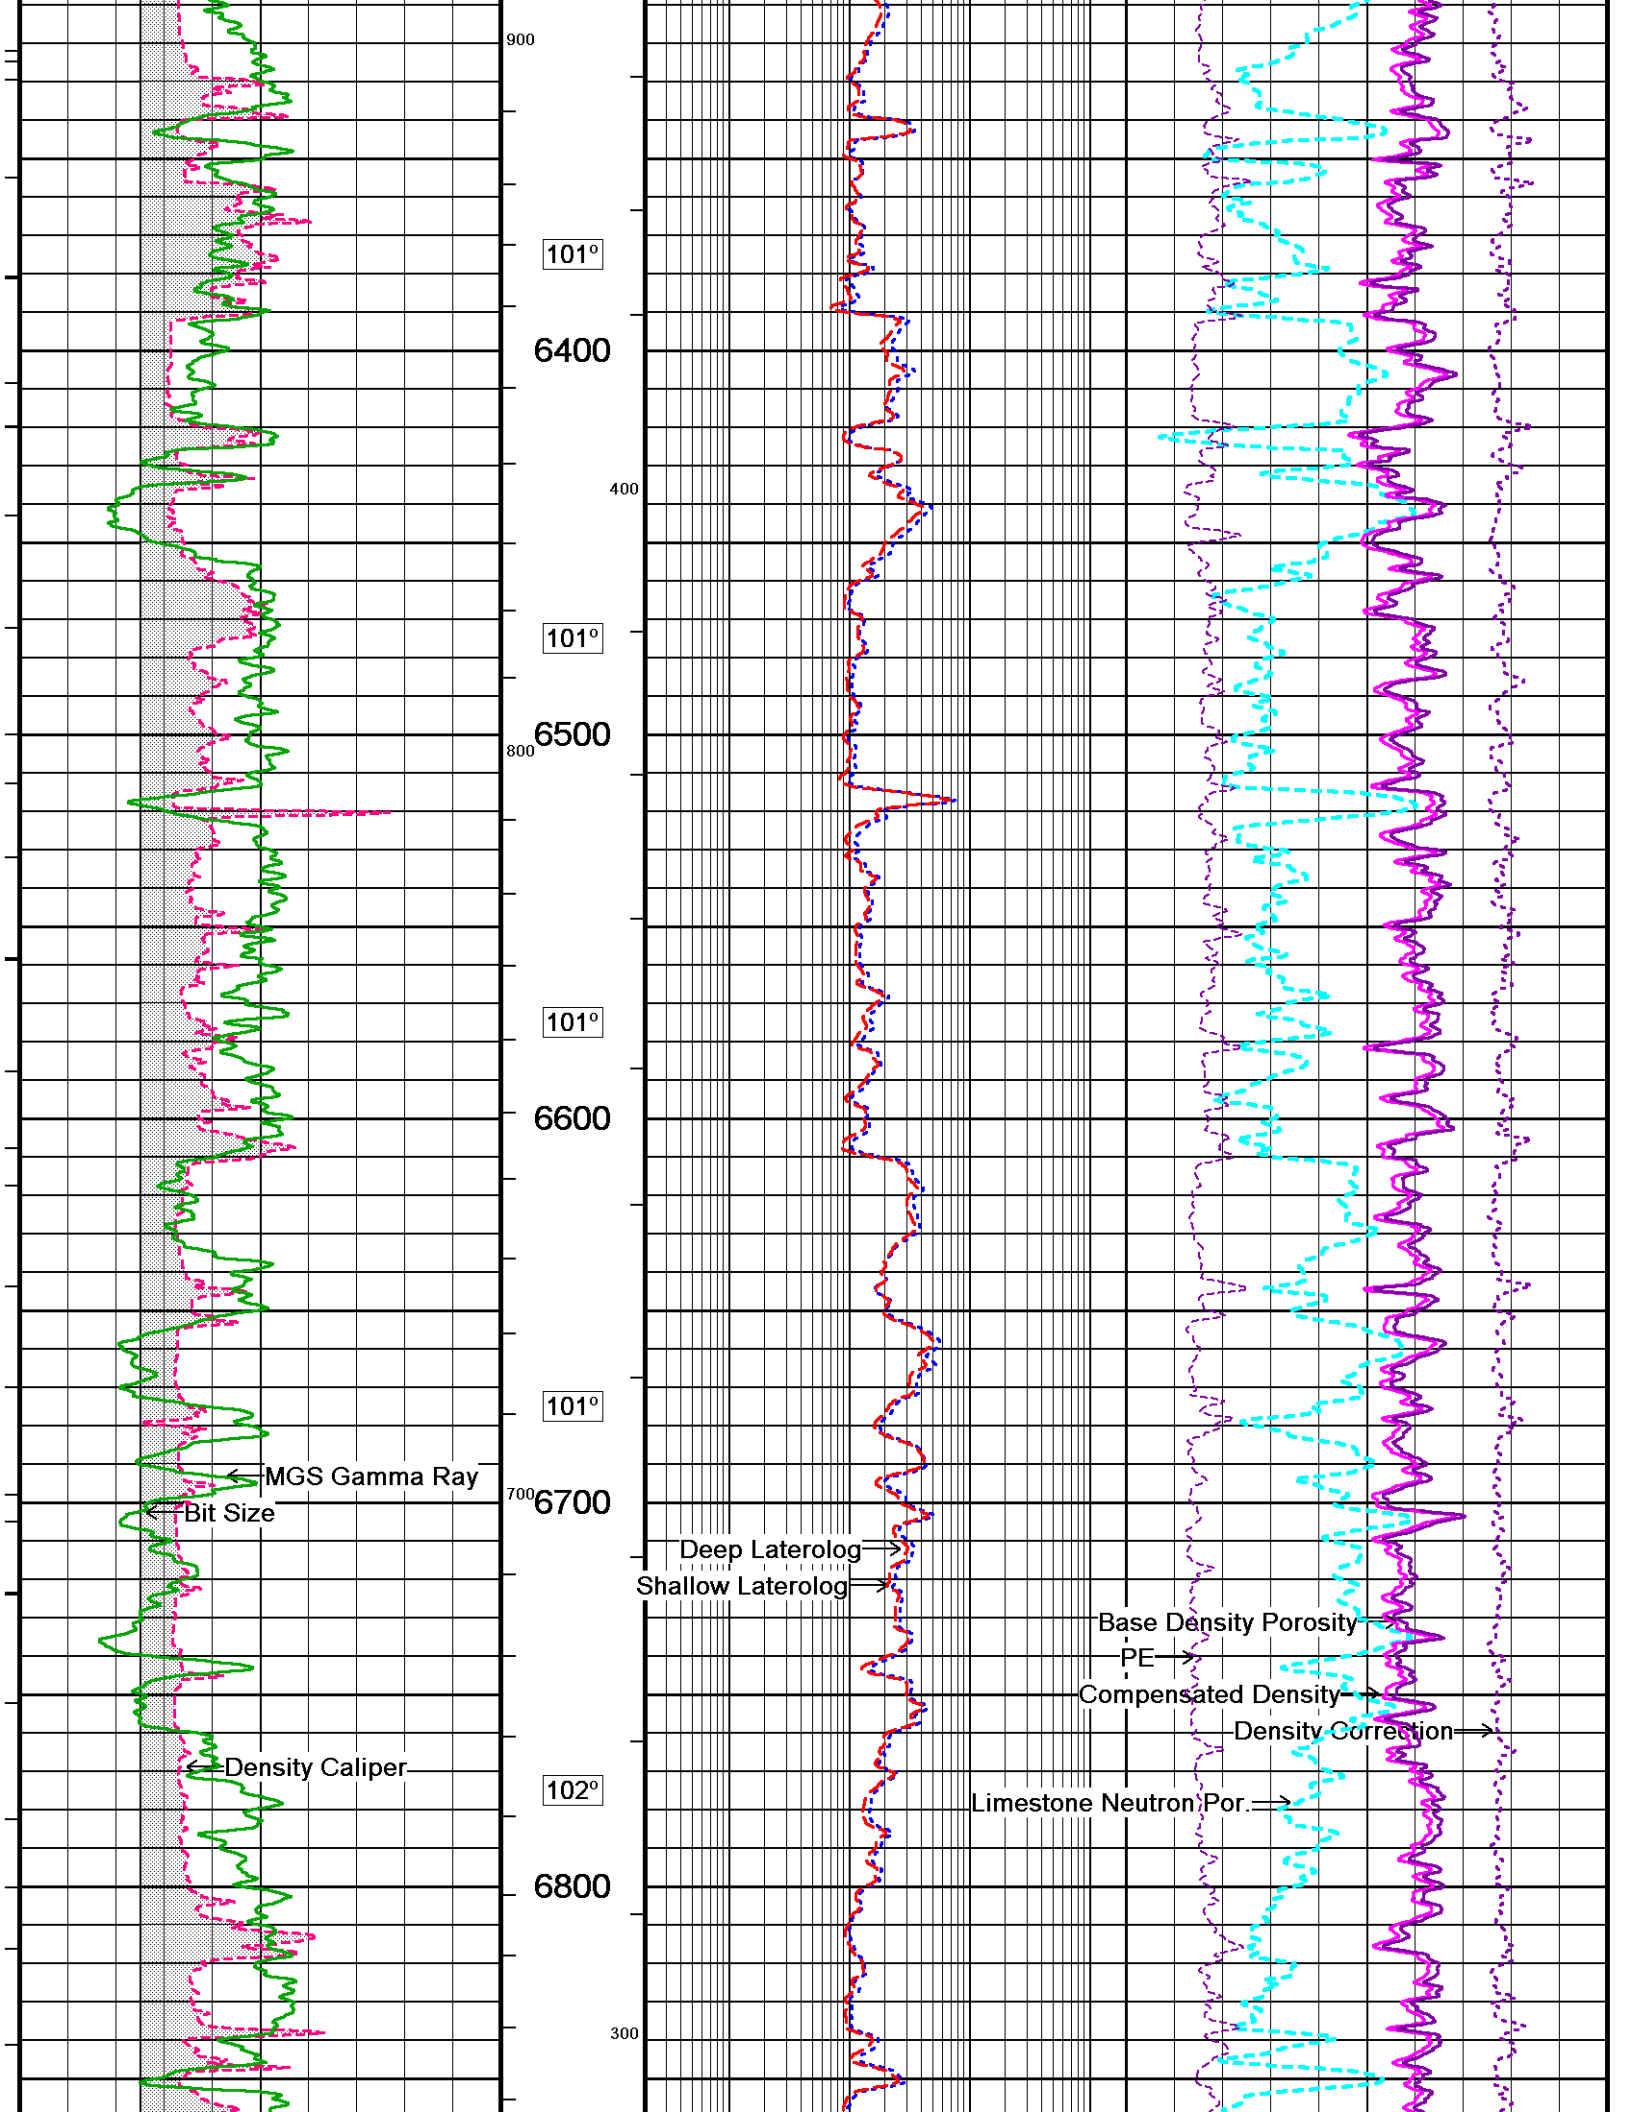

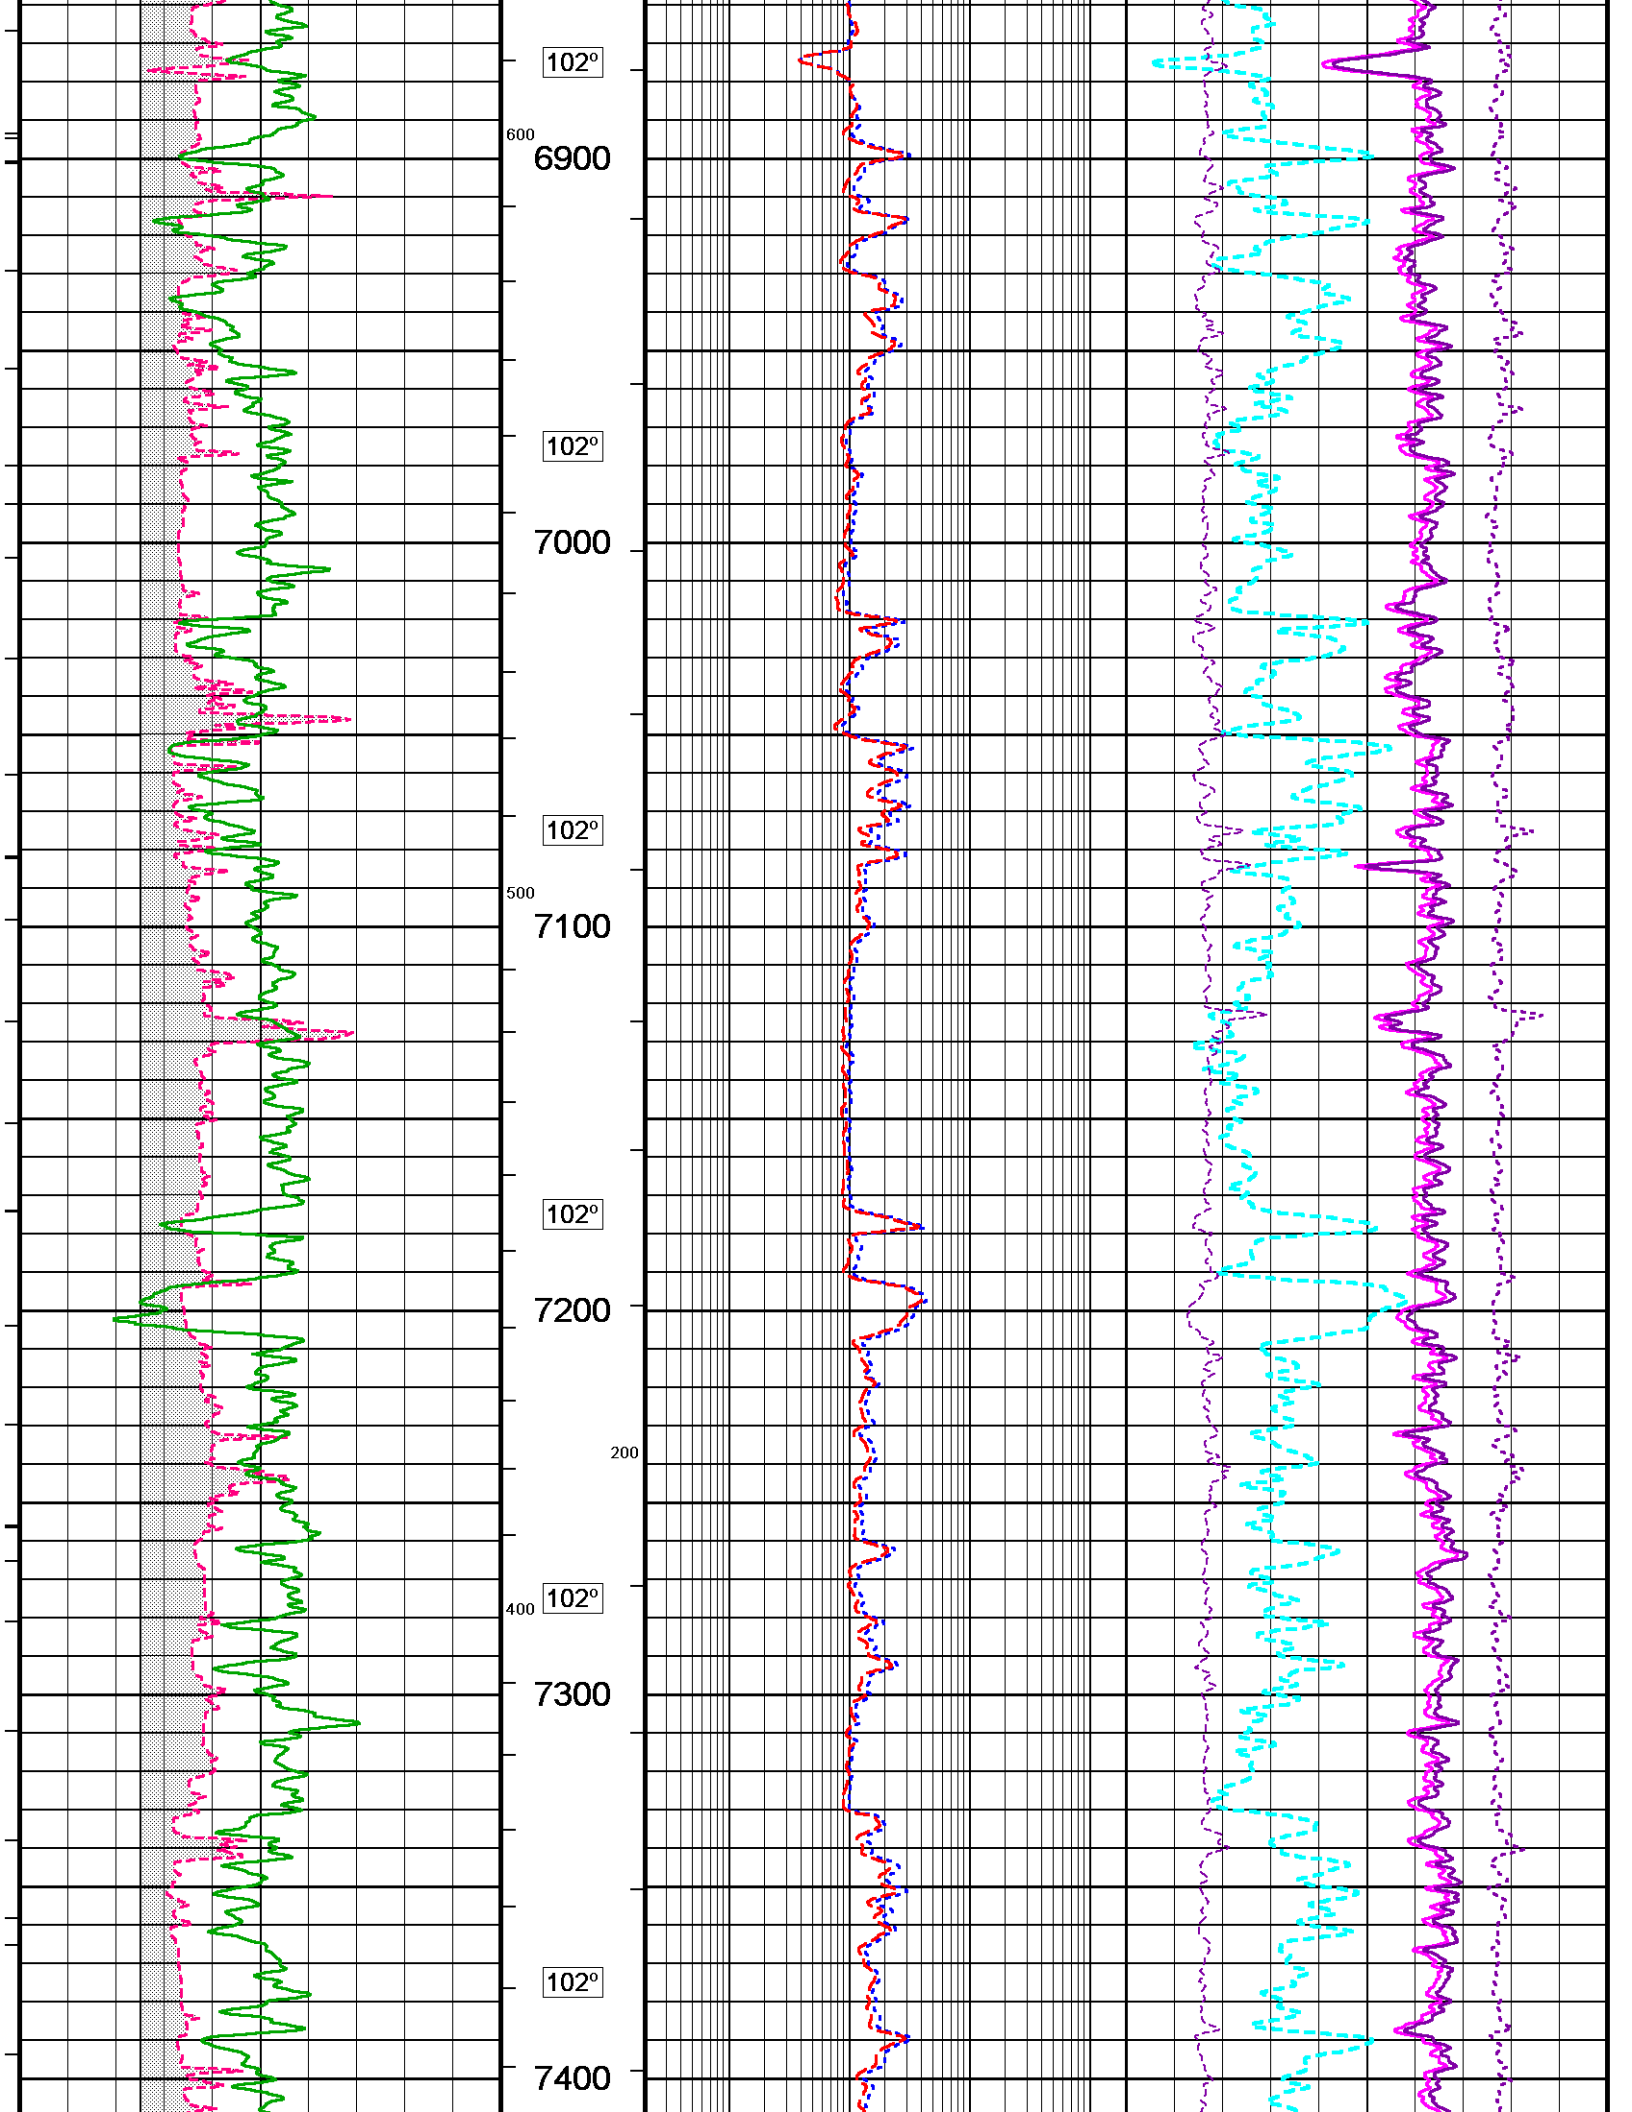

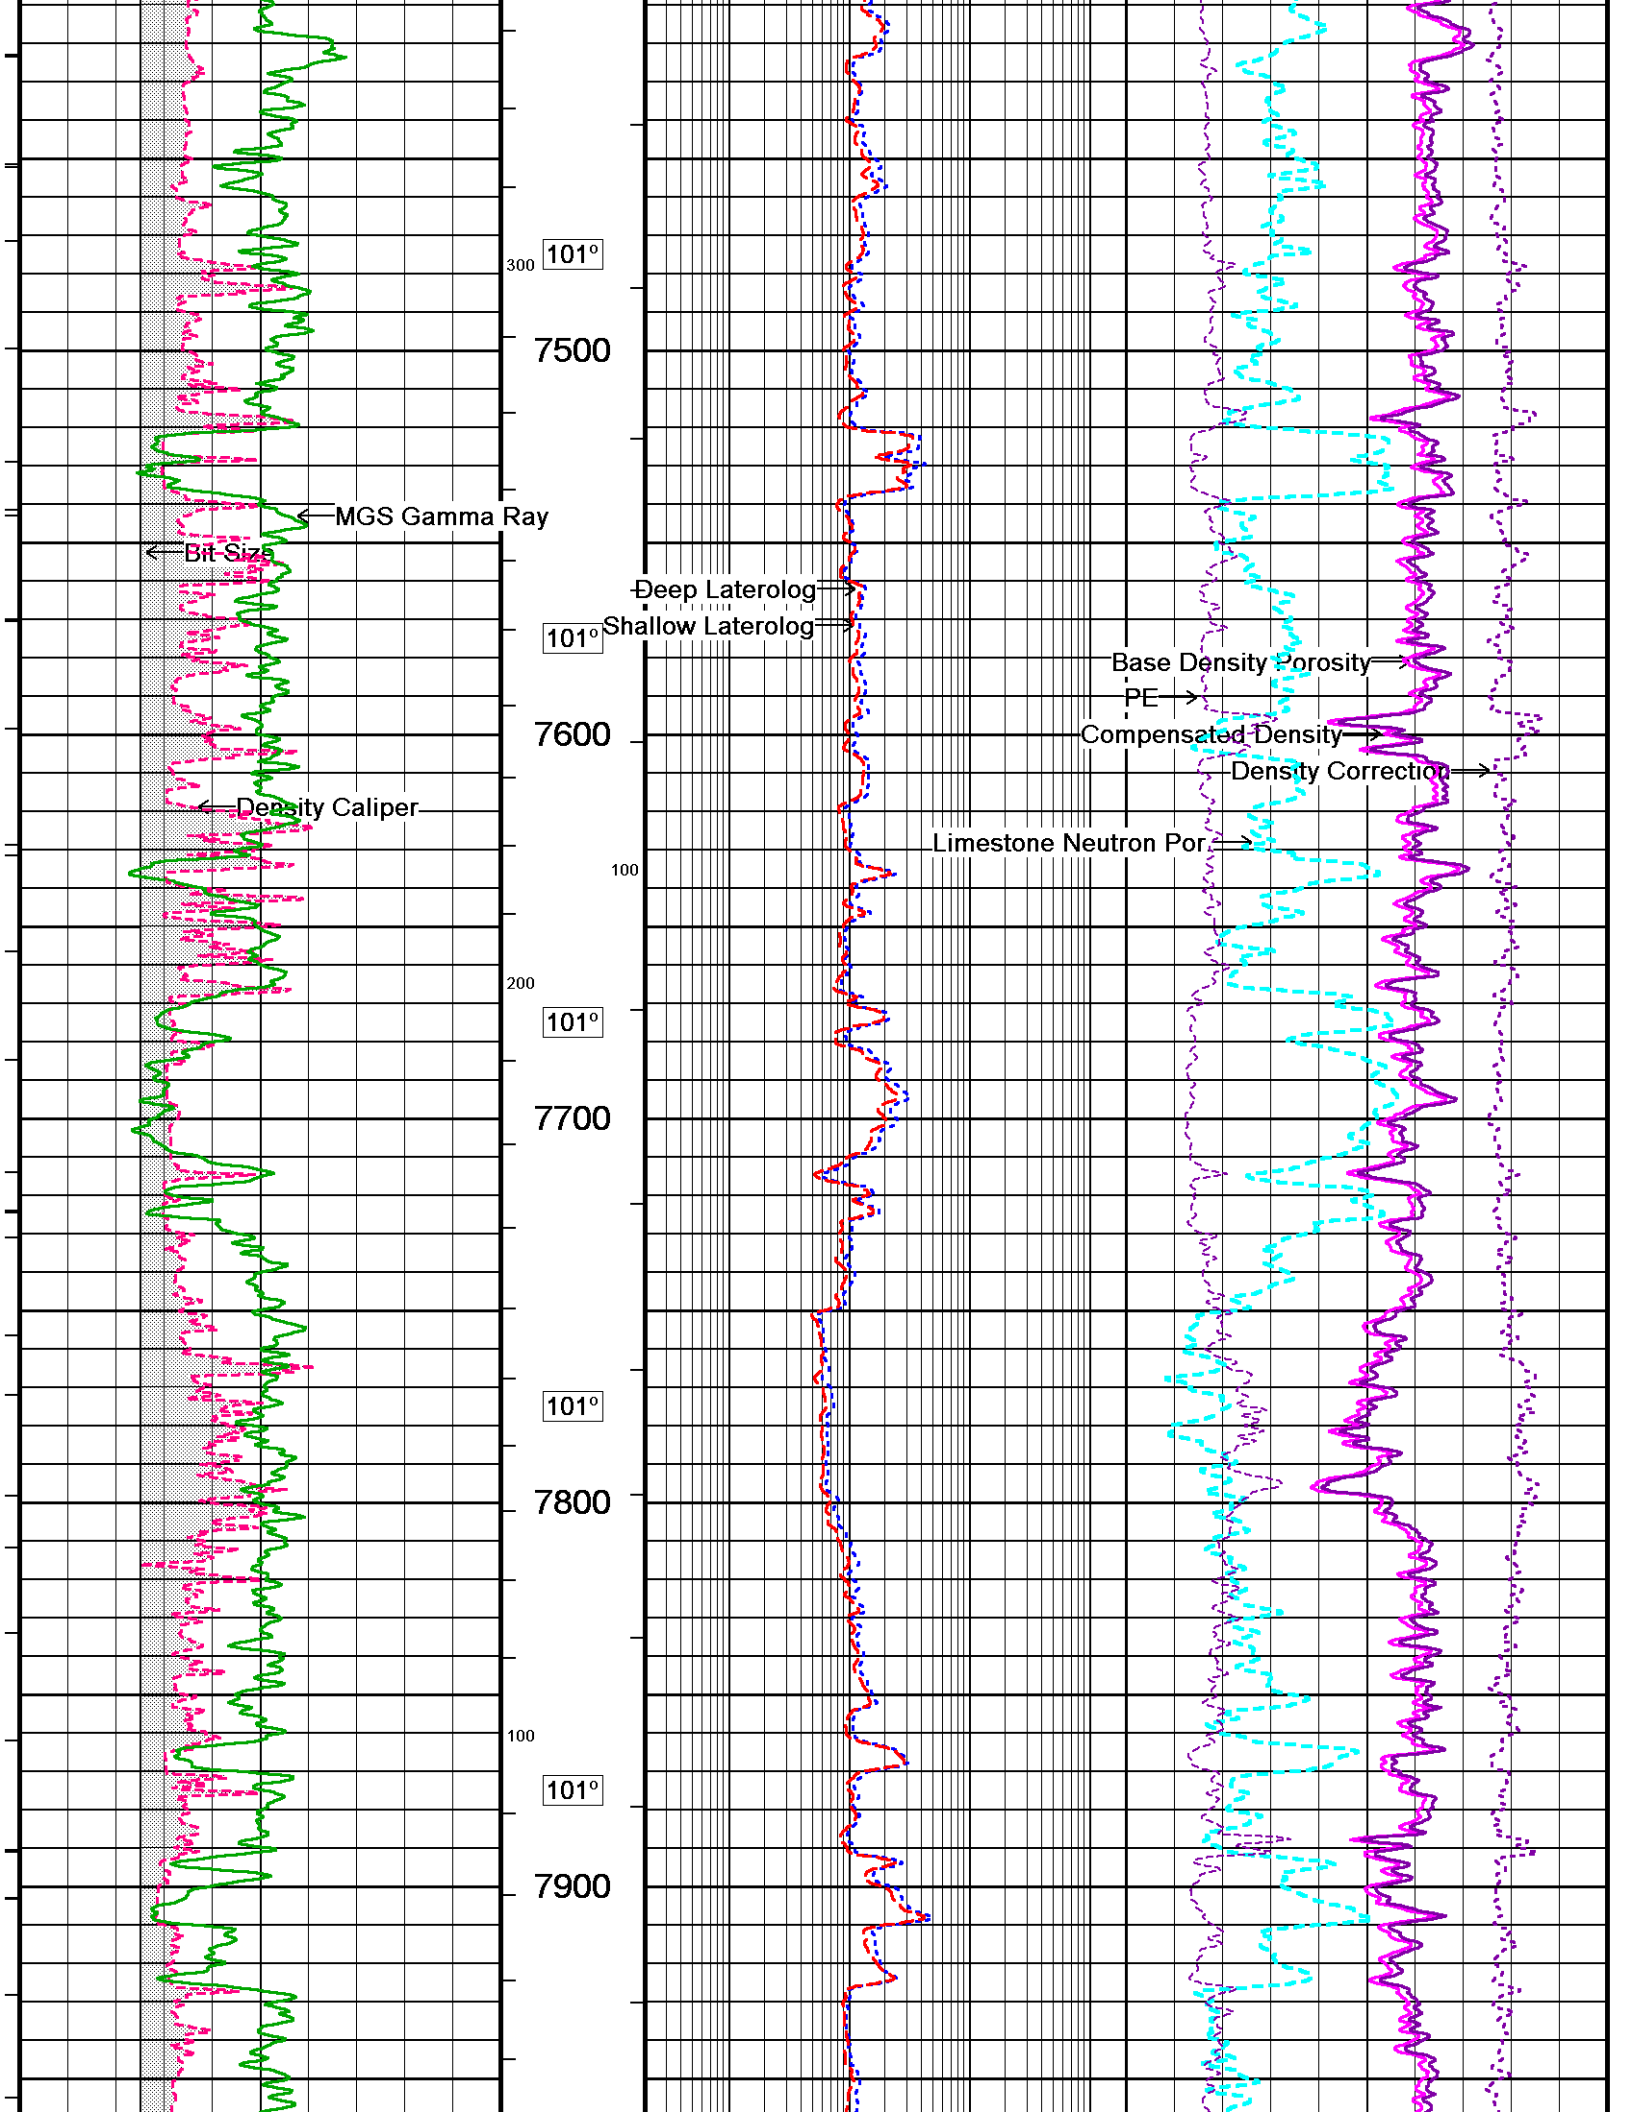

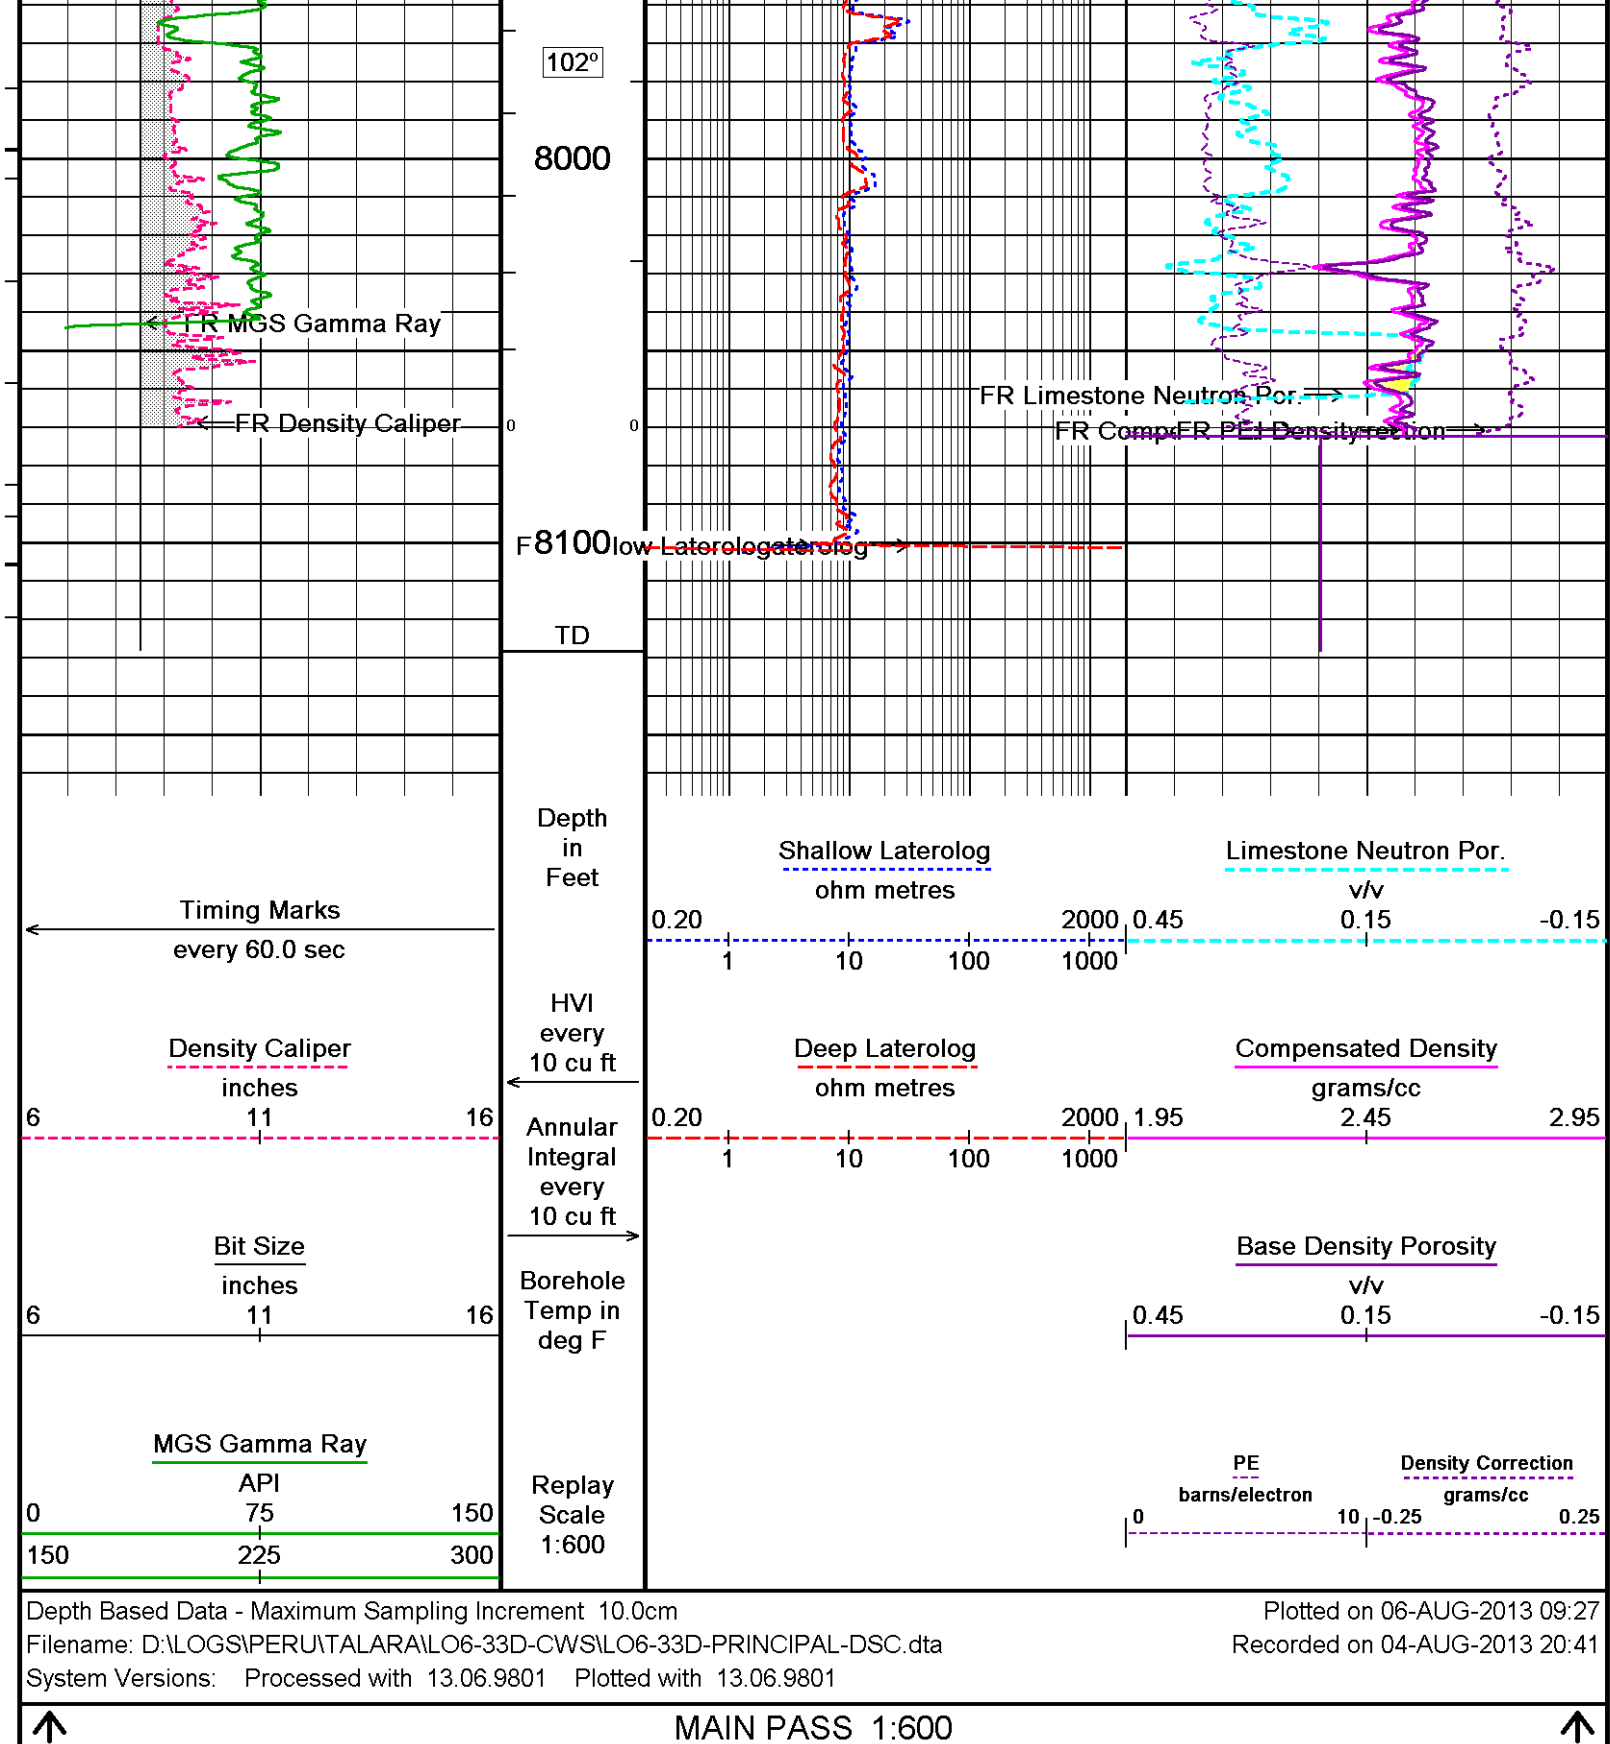

COMPANY SAVIA PERU S.A
WELL LO6-33D
FIELD LOBITOS OFFSHORE
PROVINCE/COUNTY PIURA
COUNTRY/STATE PERU

Elevation Kelly Bushing	385.00	feet	First Reading	8101.25	feet
Elevation Drill Floor	385.00	feet	Depth Driller	8150.00	feet

Elevation Driller	383.00	feet	Depth Driller	8130.00	feet
Elevation Ground Level	335.00	feet	Depth Logger	8128.25	feet


Weatherford[®]

COMBINED LOG

MDL-MGS-MDN-MPD

SCALE 2":100